



Other Uses and Add-ons:

Macro Arm (M-4): Use the M-4 module for additional versatility in flash positioning. This is especially useful in tricky situations such as shooting from a blind.

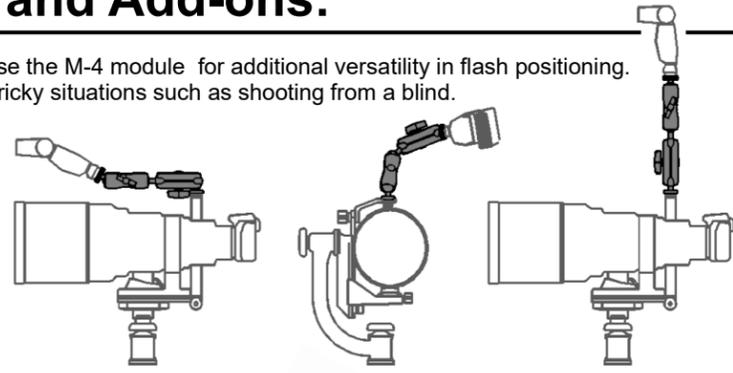


M-6 Extension Post Module:

This extends the height of your flash by up to 5" which helps reduce red eye or "steel eye" in your people or animal subjects. If you desire more extension, you can stack up to three Extension Posts to get the height you need.

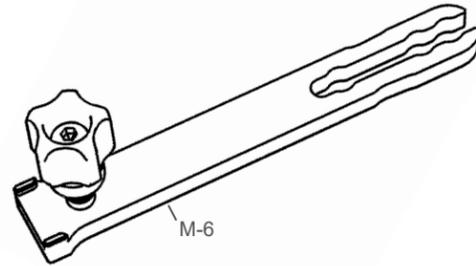


Attaching Module M-9 to Your Camera Body:

You can attach the M-9 to an Arca-Swiss style camera body plate or L-bracket as shown.

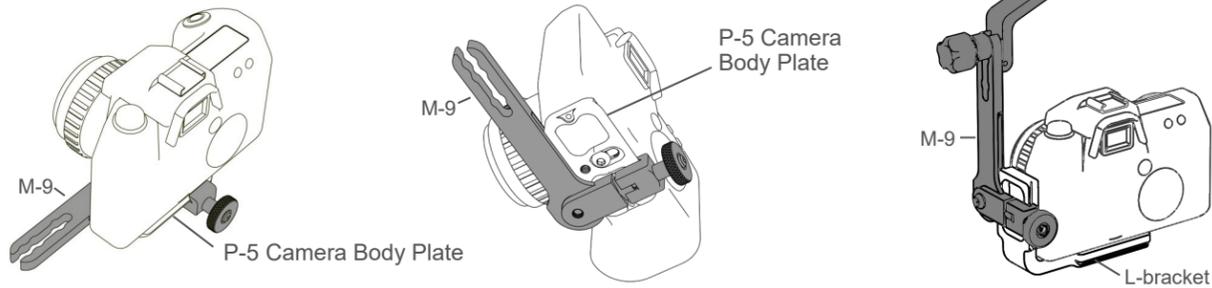

Macro, Wedding and Portrait Photography:

You can also attach an M-9 module to form a macro bracket, or attach modules M-2, M-3, & M-7 to form a quick-flip bracket for wedding & portrait photography. The M-9 can also be used with an Arca-Swiss compatible L-bracket for additional positioning flexibility.

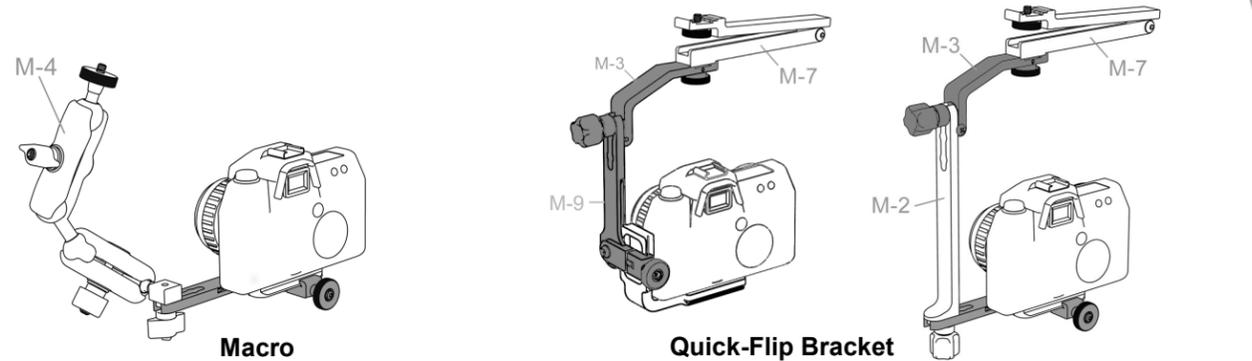

Thank you for your interest in Wimberley products. If you have any questions or comments please feel free to contact us.


F-9 Flash Bracket



7 53182 83418 4

Wimberley

Wimberley Head Version II and Sidemount Flash Bracket

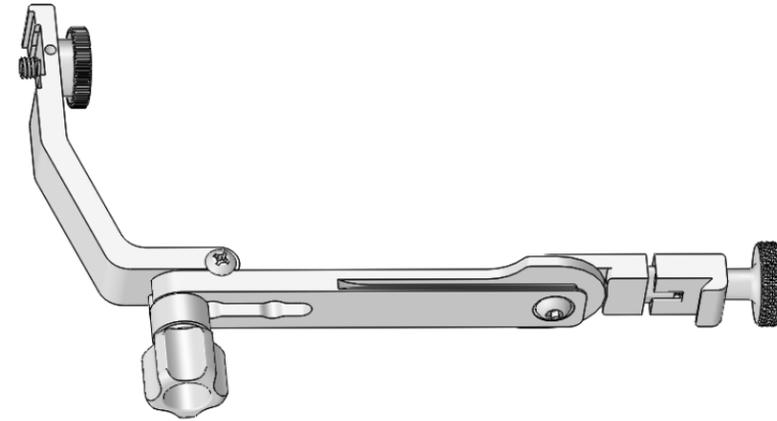

Package Contents:

M-9 Module: Wimberley Head II Upright bracket and Quick-release (Qty 1)

M-3 Module: Tilt Arm (Qty 1)

Made in USA

Dimensions (overall L x W x H): 5.5" x 1.0" x 8.5" in Weight: 6.5 oz (185g)

Wimberley, Inc.
1750 Broadway St
Charlottesville, VA
22902 USA

Phone: 1-434-529-8385

Toll Free: 1-888-665-2746 (USA & Canada)

www.tripodhead.com


info@tripodhead.com

10 Year Warranty – for details see www.tripodhead.com/warranty.cfm

Instructions on reverse >>


Attaching the F-9 Bracket to the Wimberley Head Version II:

1. Pivot the moving jaw with the knob to either side, perpendicular to the upright portion of the M-9 module. Choose the option that feels best to you and allows you to comfortably access the focusing ring on your lens
2. Loosen the bottom knob until it will fit on arm dovetail.
3. Slide the bracket down the swing arm from the top. Turn the M-9 screw knob to tighten the clamp jaws and secure the bracket on the swing arm.

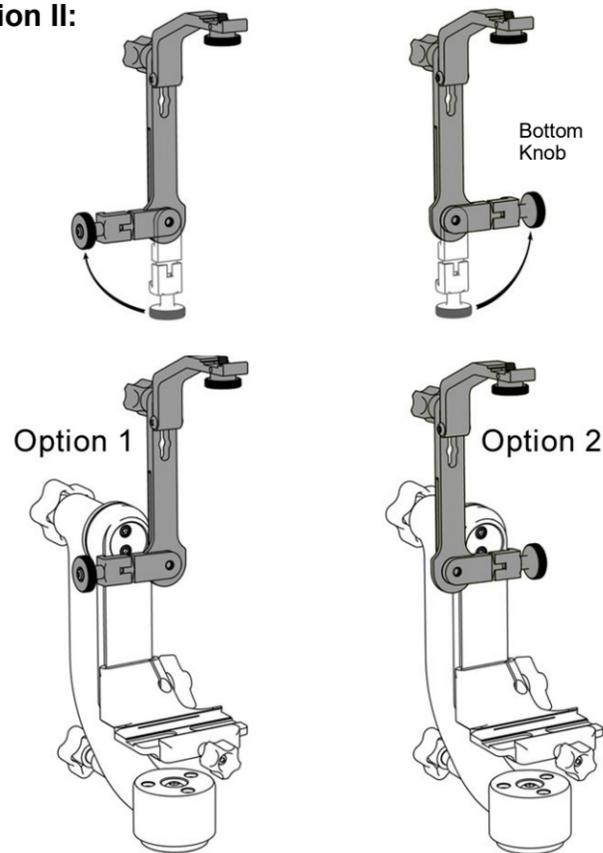

Attaching the F-9 Bracket to the Wimberley Head Sidemount or Sidekick:


Swivel the quick-release arm on the bottom of the bracket to the straight position and attach the bracket to the dovetail on your lens plate.

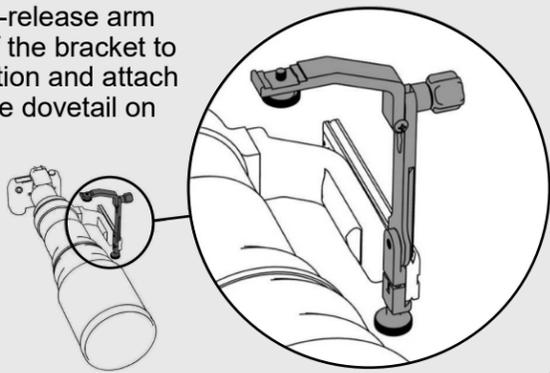

Attaching Your Flash Unit:

Wimberley Flash brackets have a 1/4"-20 mounting thumbscrew that attaches to an off-camera hot shoe cable or a cold shoe adapter such as the Wimberley AP-7. We do not sell flash cords. Please follow camera and flash unit recommendations when purchasing flash cords to ensure proper signal transmission.


Use the thumbscrew on the top of the M-3 Tilt Arm module to attach the shoe. Make sure the flash adapter seats snugly into the bottom notch of the Tilt Arm module. There should be no need to over-tighten.

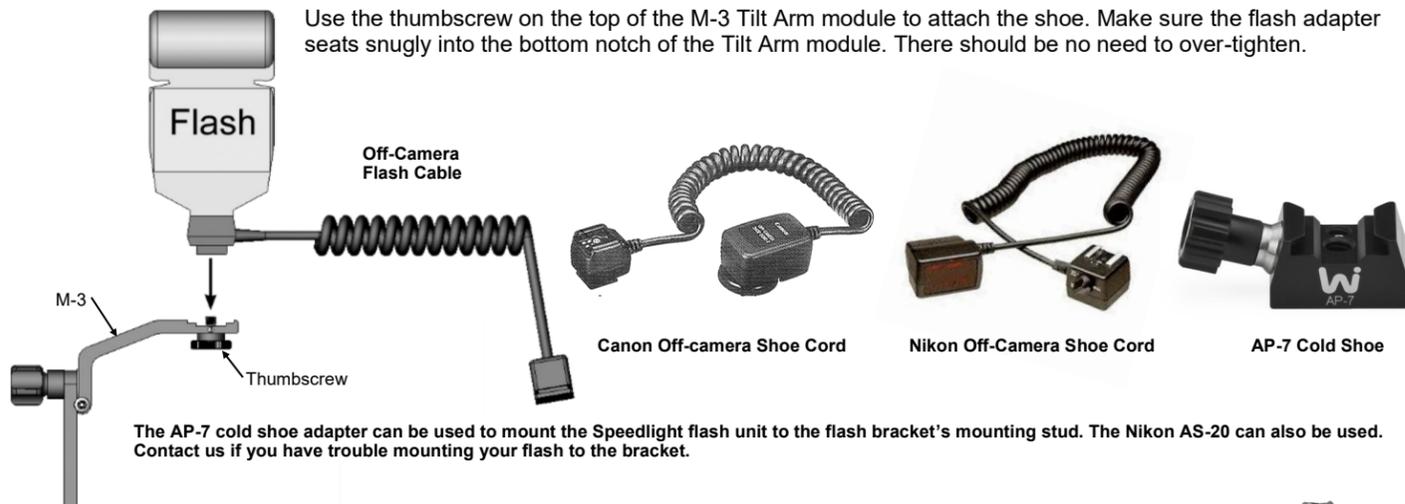

The AP-7 cold shoe adapter can be used to mount the Speedlight flash unit to the flash bracket's mounting stud. The Nikon AS-20 can also be used. Contact us if you have trouble mounting your flash to the bracket.


Nikon SC-29 compatibility note:

The Nikon SC-29 cord requires the use our FA-11 Flash Cord Adapter (sold separately) to attach the cord snugly to the bracket because the cord mounting foot is slightly too wide to fit properly in the slot on the flash arm.

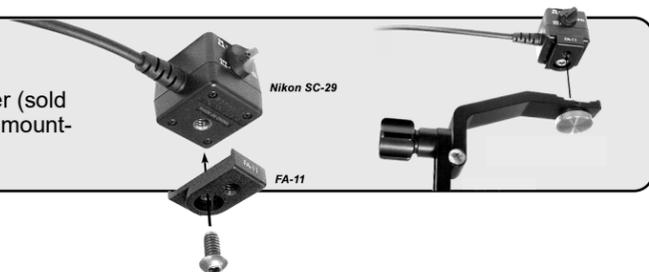

Positioning your Flash:

The Modular Flash Bracket System design allows you to easily disassemble brackets for convenient storage. It also allows you to adjust the size of the bracket to fit different sized lenses using the keyed slots of the upright module to increase or decrease the height of the flash unit. Flip the Tilt Arm upside down to lower the flash even further. When the M-3 is used flipped upside down, the thumb-screw must also be flipped. Below are some of the configurations possible.

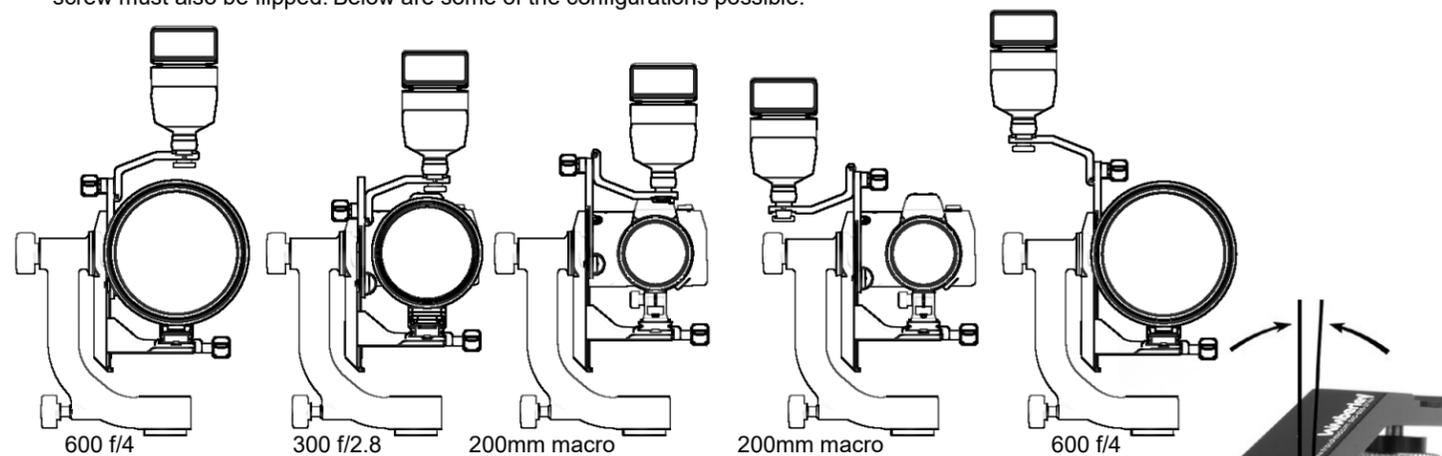


Positioning the tilt arm:

You can also swivel the Tilt Arm so that it tilts forward or backward. The Tilt Arm is fitted with two tilt stop screws that restrain tilting movement. If you wish to tilt the flash simply unscrew the appropriate side screw enough to give you the desired amount of rotation. If you are using a collared macro lens, flip the Tilt Arm upside-down and in the highest position. In this orientation, the side stop screws do not engage and the arm is completely free to tilt.

Note: For most telephoto applications no tilt is needed (even at the closest focusing distance). At a maximum you may need up to 3 degrees of forward tilt. This can be accomplished using the tilt arm stop screws or using the built-in feature on your flash unit if it so equipped.

Connecting Flash Bracket Modules:

(The figure below shows the connection between M-3 and upright module; the same principle applies for other module connections.)

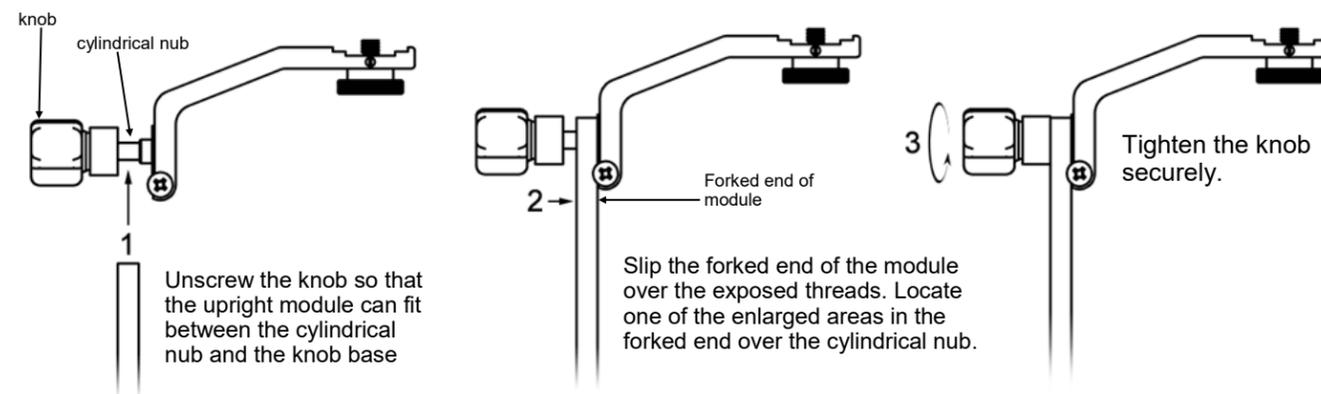

Tip: if you find the metal knobs difficult to grip, try wrapping several layers of self-fusing rubber grip tape (3M 2155) around the knob to cushion it and make it easier to grip in the field.

Feel free to contact us if you have any questions.

